



133-791
October 26, 2020

60-3006 24VDC POWER SUPPLY FOR BURNERPRO



DESCRIPTION

NOTE: This bulletin only covers the 60-3006 24VDC power supply for BurnerPRO. See bulletin BP-1003 for further information.


This power supply is used to supply 24VDC to a user interface. The user interface would typically be used to announce Modbus data.

The RJ45 splitter is wired straight through on all eight pins. Note that this splitter is not intended to be used as an Ethernet switch.



Specifications

Input power:	85 to 264VAC
Input frequency:	47Hz to 63Hz
Output power:	24VDC \pm 1.0% (adjustable 21.6V to 29V with trim pot)
Rated current:	0.64A
Rated power:	15.2W
Storage temperature:	-40°C to 80°C (-40°F to 176°F)
Operating temperature:	-30°C to 70°C (-22°F to 158°F)

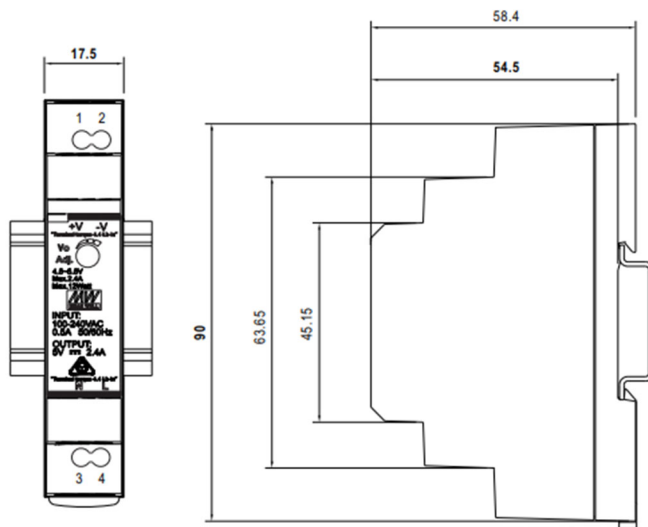

Dimensions in mm

Terminal	Use
1	24VDC+
2	24VDC-
3	Neutral AC
4	Line AC