


# Steel Mill Applications

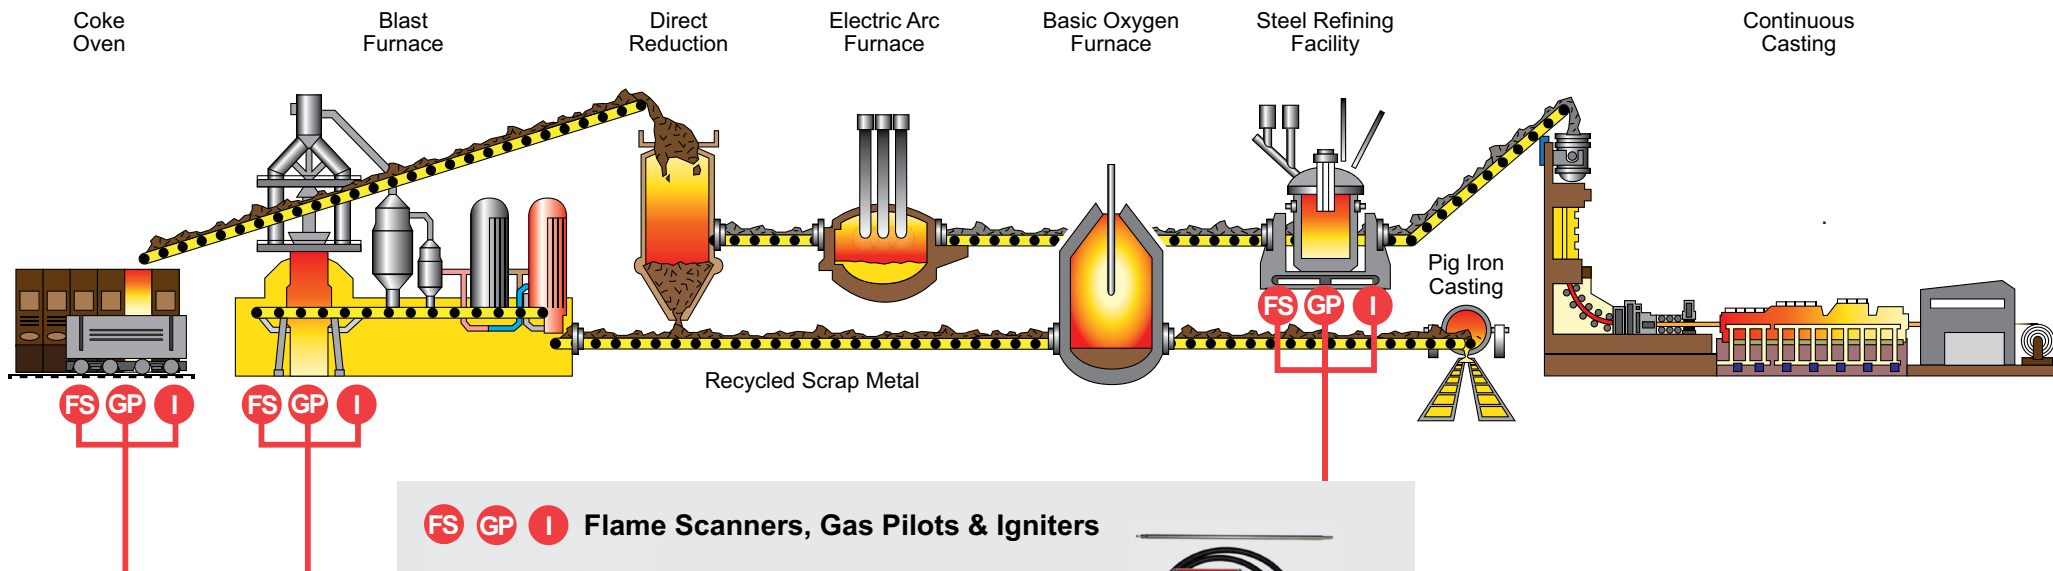

## Reliable combustion solutions for steel production

Ultraviolet (UV), Infrared (IR), Dual Sensor (UV & IR) Flame Scanners along with High Energy Spark Igniters (HESI) and Gas Pilots

## InSight® Scanners

95IR / 95 UV / 95DS / 95DSS3 /  
95IRS4 / 95UVS4

### Features

- Integrated design includes internal flame relay and 4-20mA output
- Keypad/display for programming
- Remote communications and file select capabilities
- Programmable flame flicker frequency, sensor gain, pull-in and drop-out set points, and FFRT
- 95DSS3 Infrared transmitter option



### Specifications

- 95IR infrared sensor: 700 to 1700 nm
- 95UV ultraviolet sensor: 295 to 320 nm
- 95DS dual sensor: 295 to 320 & 700 to 1700 nm
- Supply voltage: 24 VDC
- Housing: NEMA 4X, Class I, Division 2, Groups A, B, C & D
- Ex d IIC T6 ATEX
- 95DSS3 SIL3

## Phoenix Scanners

85IRF / 85UVF

### Features

- Automatic flame characterization
- Optimum gain and flicker frequency detection
- Fully automatic programming
- Easy Installation
- Streamlined user interface, simplifies operation
- Flame learn cycle completes in less than one minute
- Background flame characterized in less than one minute



### Specifications

- 85UVF QD Ultraviolet sensor: 295-320 nm
- Supply voltage: 24 VDC
- Housing: NEMA 4x, Class I, Division 2, Groups A, B, C & D
- Ex d IIC T6 ATEX

## SureFire Gas Pilots

The pilots are constructed of high temperature materials providing stable flame ignition and repeatability.

- Natural or Forced Draft Gas Pilots, outer diameter 32mm or 48mm, for intermittent or continuous duty, Class 1 to 3
- Suitable for majority of Power, Refinery and other applications
- No moving parts helps ensure longer trouble free operation with lower maintenance costs



For more information, please [contact](#) your local Fireye Distributor.

**fireye.com**

MF-00-2-000F-0-026-C (2024/08)

All trademarks and service marks referred herein are property of their respective owners.

©2024 Fireye. All Rights Reserved..



Join us on 

## SureFire™ II Igniter



The SureFire II High-Energy Ignition System is used for direct spark ignition of most gas or liquid fuels used in oil or gas pilots or main burners. The High-Energy Ignition System is available in various versions. To ensure optimal operation, the first part of the ignition tip should always be in an ignitable fuel-air mixture, during all modes of operation.

### Features

- Selectable voltage (115/230 vac).
- Visual indication of spark operation
- Proof of spark relay
- Choice of system, Integrated or Kit with or without Quick Disconnect
- Thermal cutout protection integrated in transformer
- ATEX options
- Compact “co-axial” retractors
- Safety bleed resistor discharges capacitors in 120 seconds

